


- 4-ice and water guard
- 100-FVE electrically operated, opening Skylight FAKRO
- 109-air-tight flashing
- 272-EL-T FAKRO flashing upper element
- 273-EL-T FAKRO flashing side element
- 274-EL-T FAKRO flashing lower element
- 275-thermal insulation of FAKRO flashing

ELECTRIC OPENING SKYLIGHT FVE

| Window size[in] SxL | S [in] | S [mm] | L [in] | L [mm] | Rough opening | | | |
|---------------------|--------|--------|--------|--------|---------------|--------|--------|--------|
| | | | | | W [in] | W [mm] | R [in] | R [mm] |
| 24x27 | 24 1/2 | 623 | 27 1/2 | 699 | 22 1/2 | 568 | 26 1/2 | 678 |
| 24x38 | 24 1/2 | 623 | 38 1/2 | 978 | 22 1/2 | 568 | 37 1/2 | 957 |
| 24x46 | 24 1/2 | 623 | 46 3/8 | 1178 | 22 1/2 | 568 | 45 1/2 | 1157 |
| 24x55 | 24 1/2 | 623 | 55 | 1397 | 22 1/2 | 568 | 54 | 1376 |
| 24x70 | 24 1/2 | 623 | 70 3/4 | 1797 | 22 1/2 | 568 | 70 | 1776 |
| 32x38 | 32 1/2 | 826 | 38 1/2 | 978 | 30 1/2 | 771 | 37 1/2 | 957 |
| 32x46 | 32 1/2 | 826 | 46 3/8 | 1178 | 30 1/2 | 771 | 45 1/2 | 1157 |
| 32x55 | 32 1/2 | 826 | 55 | 1397 | 30 1/2 | 771 | 54 | 1376 |
| 48x27 | 48 1/2 | 1232 | 27 1/2 | 699 | 46 1/2 | 1177 | 26 1/2 | 678 |
| 48x46 | 48 1/2 | 1232 | 46 1/2 | 1178 | 46 1/2 | 1177 | 45 1/2 | 1157 |

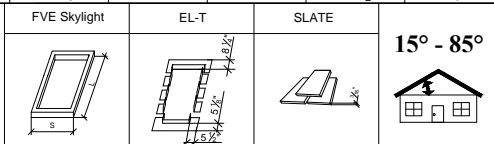

Vertical and horizontal cross-sections:
FVE opening Skylight with flashing EL-T
for flat tiled roofs

FORMAT A4
SCALE 1:10/1:5
DATA 06.2022

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality on the roof. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.